



ACION 8000 Series

A8KFT3 1310nm Forward Optical Transmitter


The ACION 8000 A8KFT3-1310nm forward optical transmitter is a head-end equipment for HFC or FTTH applications. This compact and cost effective module is 3 RU in height and up to 12 modules can be integrated in the 19-inch high-density chassis (A8KMF3).

The RF transmission bandwidth is up to 1GHz. The high performance AGC and RGC functions make very stable optical output for wide RF input range which is very convenient in field application.


Features

- ◆ Up to 1 GHz transmission bandwidth.
- ◆ Cooled DFB laser diode with isolator.
- ◆ 1310 nm optical wavelength.
- ◆ Plug-in JXP attenuator pads for RF gain control.
- ◆ Hot-swappable.
- ◆ Remote monitor and control function by HMS or SNMP.
- ◆ RF front-panel test point.
- ◆ Optical connector: SC/APC with shutter(standard), FC/APC or E2000/APC (optional).

Block Diagrams

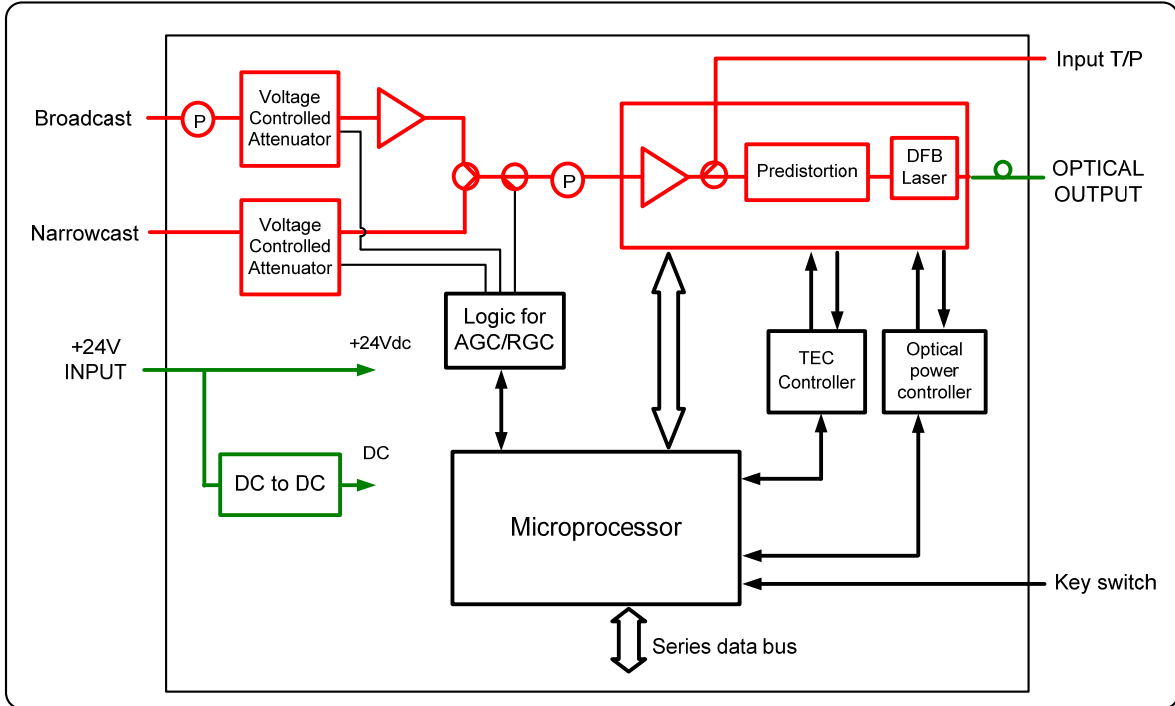

Application

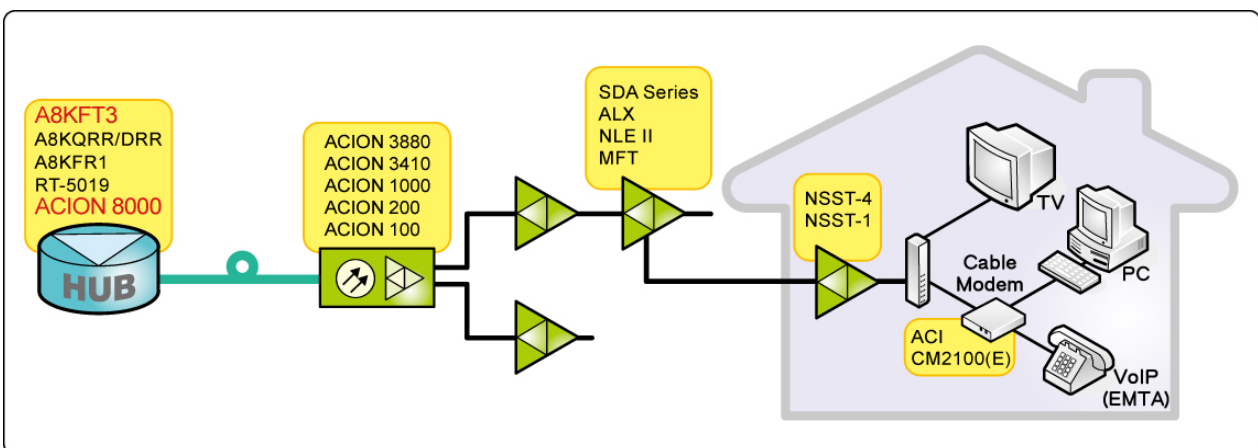

Specifications

ACI		ACION8000 Series A8KFT3 1310nm Forward Optical Transmitter		
PARAMETERS	CONDITIONS	UNITS	SPECIFICATION	NOTES
Optical Specification				
Laser Type			Cooled DFB LD with isolator	
Optical Wavelength		nm	1310 ± 10	
Connector Type			SC/APC (standard) FC/APC, E2000/APC (optional)	
Optical Power		dBm	Standard: 3,6,10,13 Optional: 4,5,7,8,9,11,12	
RF Parameters				
Operating Bandwidth		MHz	50 to 1003	
Channel Loading	NTSC	channel	79 Analog 75 Digital QAM	
RF Input Return Loss	Worst Case	dB	-16	
Broadcast RF Input Level (Analog Channels)	AGC mode	dBmV/ch	11 to 19 (14~22 for A8KFT3-13-XX)	
	MGC mode	dBmV/ch	15(18 for A8KFT3-13-XX) (79 NTSC channel loading)	
Narrowcast RF Input Level (Digital QAM Channels)	AGC mode	dBmV/ch	26 to 34 (29~37 for A8KFT3-13-XX)	
	MGC mode	dBmV/ch	30(33 for A8KFT3-13-XX) (QAM carriers @ -6dBc)	
Remote Gain control range	RGC mode	dB	-4 ~ +4 (Total 50Ω RF Input Level 0±0.5)	
Flatness (Peak-to-Valley)	50 to 1003MHz	dB	± 0.5	
Test Point		dB	0 ± 0.5	
Port-to-Port Isolation (Narrowcast to Broadcast)		dB	50	
Distortion Performance				
Composite Second Order (CSO)	Max.	dBc	-65	
Composite Triple Beat (CTB)	Max.	dBc	-70	
Cross-Modulation		dBc	-65	

Specifications

ACI		ACION8000 Series A8KFT3 1310nm Forward Optical Transmitter		
PARAMETERS	CONDITIONS	UNITS	SPECIFICATION	NOTES
Electrical/Environmental/Mechanical				
RF Connector Type	Rear Panel		F type female	
Module Width		slot	1	
Dimensions	D×H×W	in. (mm)	16.1 x 5.0 x 1.0 (410.0 x 127.0 x 25.9)	
Operating Temperature		°F (°C)	32 to 122 (0 to 50)	
Storage Temperature		°F (°C)	-40 to 149 (-40 to 65)	
Relative Humidity	Non-condensing	%	0 ~ 95	
Power Consumption	Max.	W	15.6	

Performance Specifications

Carrier-to-Noise

Model #	Output Power	Total Optical Link Loss (dB)															
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
A8KFT3-03-XX	3-4 dBm	54.0	53.0	52.0	51.0	50.0											
A8KFT3-04-XX	4-5 dBm		54.0	53.0	52.0	51.0	50.0										
A8KFT3-05-XX	5-6 dBm			54.0	53.0	52.0	51.0	50.0									
A8KFT3-06-XX	6-7 dBm				54.0	53.0	52.0	51.0	50.0								
A8KFT3-07-XX	7-8 dBm					54.0	53.0	52.0	51.0	50.0							
A8KFT3-08-XX	8-9 dBm						54.0	53.0	52.0	51.0	50.0						
A8KFT3-09-XX	9-10 dBm							53.5	52.5	51.5	50.5	49.5					
A8KFT3-10-XX	10-11 dBm								53.5	52.5	51.5	50.5	49.5				
A8KFT3-11-XX	11-12 dBm									53.0	52.0	51.0	50.0	49.0			
A8KFT3-12-XX	12-13 dBm										53.0	52.0	51.0	50.0	49.0		
A8KFT3-13-XX	13-14 dBm												53.0	52.0	51.0	50.0	49.0

Note: CNR numbers based on 79CH NTSC analog and 75CH digital carriers, OMI 3.2%.

Ordering Matrix

A8KFT3 1310nm Configuration Sheet

Customer: _____

Created By: _____

ORDERING MATRIX

2009/5/4

Position		1	2	3	4
PART NUMBER	A8KFT3-1310nm	—	1	0	—

1-2 Output Power

0	3	= 3 dBm (standard)
0	4	= 4 dBm
0	5	= 5 dBm
0	6	= 6 dBm (standard)
0	7	= 7 dBm
0	8	= 8 dBm
0	9	= 9 dBm
1	0	= 10 dBm (standard)
1	1	= 11 dBm
1	2	= 12 dBm
1	3	= 13 dBm (standard)

3.4 CONNECTOR

S	C	= SC/APC with shutter (standard)
F	C	= FC/APC
E	2	= E2000/APC

NOTES:



ACI Communications, Inc.
23307 66th Avenue South
Kent, WA 98032

Rev M 10-26-2015 Printed in U.S.A.
ACI Communications, Inc. reserves the right to discontinue the manufacture or change specifications without prior notice on any parts illustrated in this data sheet. Registered trademarks are the property of their respective owner