



LT806 FTTH / GPON OLT

FTTH/GPON OLT


The LT806 is a 6RU height chassis based GPON OLT system which is comprised of 10 slots for 6 service modular slots, 2 switching fabric slots and 2 uplink slots for delivering a wide range of full-featured and high-performance over FTTx applications. It is a high-density chassis system that supports up to 6,144 residential and business subscribers with 96 GPON ports (1:64 split ratio). The most compact type GPON OLT chassis system supporting GPON protection worldwide. LT806 features high capacity GPON access and 10GbE uplink and line rate performance with a 960 Gbps non-blocked switch fabric.

The LT806 is ready for XG-PON services, the service line card fully supported by 8 ports of XG-PON signal in the same chassis. LT806 guarantees equipment-level reliability with full redundancy design concept for all SFU / Power / GPON modules. The PON technology adds new features and functionality targeted at improving performance and inter-operability, and adds support for new applications, services, and deployment scenarios.

Features

- ◆ 96 GPON ports per chassis (16 Port per Unit)
- ◆ Ready for 48 XG-PON ports per chassis (8 Port per Unit)
- ◆ 4 x 10GE/GE Uplink (Selectable) per slot
- ◆ Multi-service chassis for FTTx deployments with full redundancy
- ◆ Support/delivery of various service types
- ◆ Non-stop forwarding, Non-stop routing features based on distributed architecture
- ◆ VoIP, IP-TV, high-speed internet, mobile, etc.
- ◆ Selective service/uplink modular units for flexible network
- ◆ High capacity GPON access and 10GbE uplink and line rate performance
- ◆ Realtime network traffic monitoring
- ◆ Common & CLI via console/telnet
- ◆ SNMPv2/v3 with RMON, Alarms
- ◆ L2/L3/L4 classification / priority management

FTTx Network Diagram

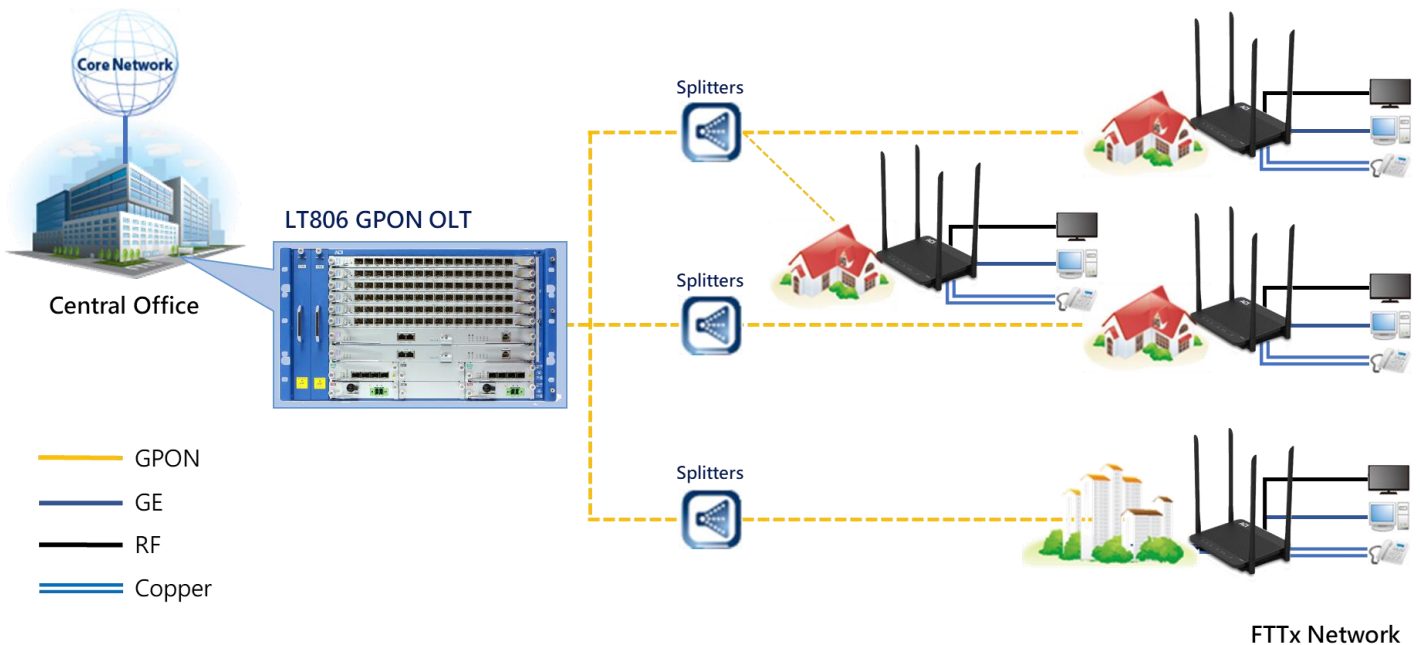

LT806 OLT Specifications	
General Specifications	Specifications
Flash Memory	8MB (Boot) + 128 MB (NOS)
SDRAM	4GB (DDR3)
Service Port	6 Slot for SIU (Service Interface Unit): - SIU_GPON16: 16 GPON (SFP, SC/PC) - SIU_GPON16T*: 16 GPON (SFP, SC/PC) - SIU_XGPON8*: 8XG-PON1 (XFP, SC/PC)
Uplink Port	2 Slots for NIU (Network Interface Unit) - NIU_10GE4: 4x 10GE Ports (SFP+) or 4 GE Port (SFP)
Management	Management Interface: - 1 Port RS-232 for Console (RJ45) - 1 Port Tx for MGMT (RJ45) - 1 Port for microSD Interface
MAC Table	32K (Max 288K)
Routing Table	16K (IPv4) / 8K (IPv6)
VLAN	4K
Switching Capacity	960 Gbps
Operating Temp.	0°C to 50°C
Operating Humidity	20 to 80% (non-condensing)
Power Voltage	Input: -48 VDC (redundancy)
Dimension (W x H x D)	482.6 x 280 x 266.4 mm
Capabilities	Specifications
Layer 2	Standard Ethernet Bridging Port / Subnet / Protocol - based VLAN Spanning Tree: STP, RSTP, MSTP 802.3ad Link Aggregation
Layer 3	IPv4 / IPv6 Routing RIPv1/v2, OSPFv2, BGPv4 Virtual Router Redundancy Protocol (VRRP)
Multicast	IGMP v1/v2/v3, PIM-SM/SSM IGMP Snooping Multicast VLAN Registration (MVR)
GPON	GPON OLT Compliant with ITU-T G.984 Remote ONT/MDU Management Automatic ONT Ranging Multiple T-CONTs per MDU (ONT) Supports up to 64 (max 128) Connections Over a Single Fiber
Management	Serial / Telnet (CLI) SNMPv1/v2/v3, RMON
MPLS (*Plan)	RSVP-TE and Path Protection and Local Repair (Head-End) Role EXP-Based QoS Clock Sync*: BITS IEEE 1588v2, SyncE
QOS	Traffic Scheduling (SP, WRR, DRR) 8 Queue per Port Advance Traffic Management - Metering, Egress Shaping

Ordering Information	
Part Number	Description
LT806-CHS	LT806 CHASSIS 6RU 96 Port GPON OLT
LT806-SIU-GP08	LT806 8-Port GPON interface Unit
LT806-SIU-GP16	LT806 16-Port GPON interface Unit
LT806-SIU-XGSP08	LT806 8-Port XGS-PON interface Unit
LT806-SIU-BPNL	LT806 Blank panel for SIU
LT806-NIU-10GE04	LT806 4-Port 10GBase-R interface Unit + SFP+ optic module
LT806-NIU-100GE01	LT806 1-Port 100GE interface Unit + QSFP28
LT806-NIU-BPNL	LT806 Blank panel for NIU
LT806-SFU-640G	LT806 SFU Switching capacity: 640 Gbps
LT806-SFU-1360G	LT806 SFU Switching capacity: 1,360Gbps
LT806-CIF-BPNL	LT806 Blank panel for Clock interface Module
LT806-OLP-BPNL	LT806 Blank panel for OLP Module
LT806-PSU-DC	LT806 -48VDC Power Supply
LT806-PSU-BPNL	LT806 Blank Panel for PSU DC
LT806-FANU	LT806 Fan Module
LT806-FANU-BPNL	LT806 Blank Panel for FAN
LT806-DFT	LT806 Dust Filter
LT806-CBD	LT806 Cable Duct



ACI Communications, Inc.
23307 66th Avenue South
Kent, WA 98032

Rev D 02-12-2021 Printed in U.S.A.
ACI Communications, Inc. reserves the right to discontinue the manufacture or change specifications without prior notice on any parts illustrated in this data sheet. ACI and DSIM are registered trademarks and ASEM and ACION are trademarks of ACI. Other trademarks are the property of their respective owners, and ACI is in no way affiliated with these companies.