



LT806 FTTH / GPON OLT

FTTH/GPON OLT


The LT806 is a 6RU height chassis based GPON OLT system which is comprised of 10 slots for 6 service modular slots, 2 switching fabric slots and 2 uplink slots for delivering a wide range of full-featured and high-performance over FTTx applications. It is a high-density chassis system that supports up to 6,144 residential and business subscribers with 96 GPON ports (1:64 split ratio). The most compact type GPON OLT chassis system supporting GPON protection worldwide. LT806 features high capacity GPON access and 10GbE uplink and line rate performance with a 960 Gbps non-blocked switch fabric.

The LT806 is ready for XG-PON services, the service line card fully supported by 8 ports of XG-PON signal in the same chassis. LT806 guarantees equipment-level reliability with full redundancy design concept for all SFU / Power / GPON modules. The PON technology adds new features and functionality targeted at improving performance and inter-operability, and adds support for new applications, services, and deployment scenarios.

Features

- ◆ 96 GPON ports per chassis (16 Port per Unit)
- ◆ Ready for 48 XG-PON ports per chassis (8 Port per Unit)
- ◆ 4 x 10GE/GE Uplink (Selectable) per slot
- ◆ Multi-service chassis for FTTx deployments with full redundancy
- ◆ Support and delivery of various service types
- ◆ Non-stop forwarding, Non-stop routing features based on distributed architecture
- ◆ VoIP, IP-TV, high-speed internet, mobile, etc.
- ◆ Selective service/uplink modular units for flexible network
- ◆ High capacity GPON access and 10GbE uplink and line rate performance
- ◆ Realtime network traffic monitoring and analyzing
- ◆ Common & CLI via console/telnet
- ◆ SNMPv2/v3 with RMON, Alarms
- ◆ L2/L3/L4 classification / priority management

FTTx Network Diagram

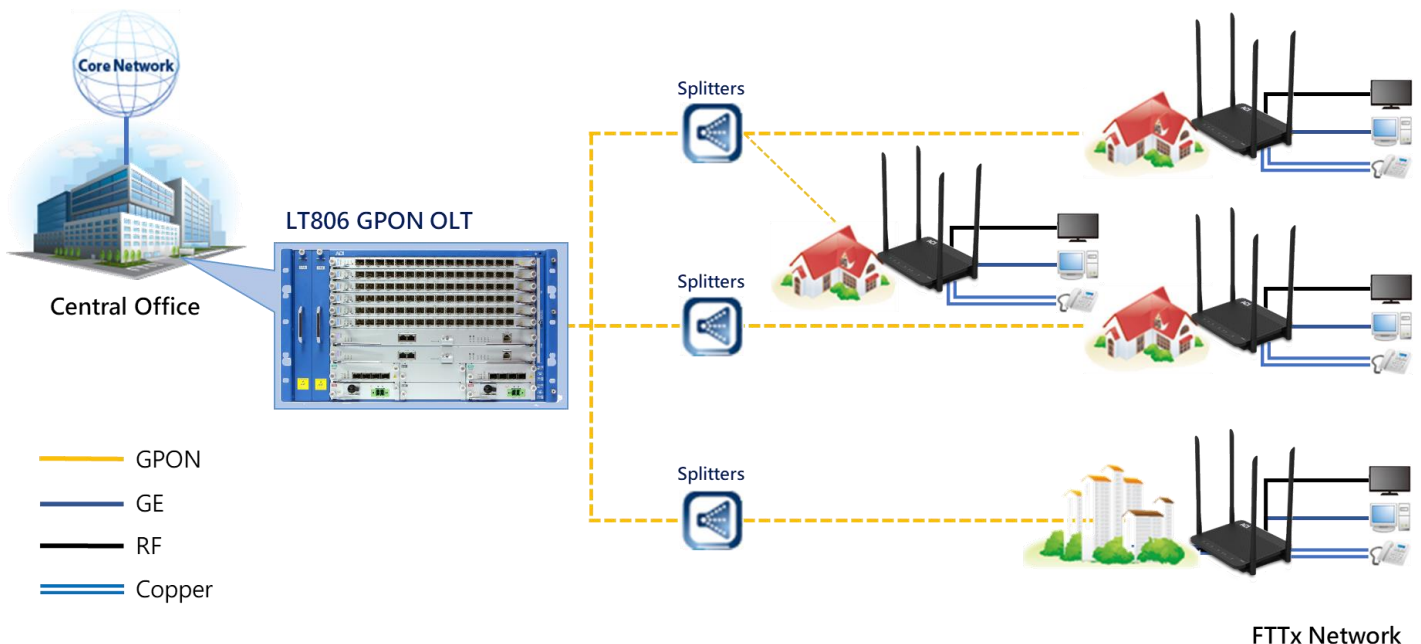

LT806 OLT Specifications	
General Specifications	Specifications
Flash Memory	8MB (Boot) + 128 MB (NOS)
SDRAM	4GB (DDR3)
Service Port	6 Slot for SIU (Service Interface Unit): - SIU_GPON16: 16 GPON (SFP, SC/PC) - SIU_GPON16T*: 16 GPON (SFP, SC/PC) - SIU_XGPON8*: 8XG-PON1 (XFP, SC/PC)
Uplink Port	2 Slots for NIU (Network Interface Unit) - NIU_10GE4: 4x 10GE Ports (SFP+) or 4 GE Port (SFP)
Management	Management Interface: - 1 Port RS-232 for Console (RJ45) - 1 Port Tx for MGMT (RJ45) - 1 Port for microSD Interface
MAC Table	32 K (Max 288K)
Routing Table	16K (IPv4) / 8K (IPv6)
VLAN	4K
Switching Capacity	960 Gbps
Operating Temp.	0 ~ 50°C
Operating Humidity	20 ~ 80% (non-condensing)
Power Voltage	Input: -48VDC (redundancy)
Dimension (W x H x D)	482.6 x 280 x 266.4 mm
Capabilities	Specifications
Layer 2	Standard Ethernet Bridging Port / Subnet / Protocol - based VLAN Spanning Tree: STP, RSTP, MSTP 802.3ad Link Aggregation
Layer 3	IPv4 / IPv6 Routing RIPv1/v2, OSPFv2, BGPv4 Virtual Router Redundancy Protocol (VRRP)
Multicast	IGMP v1/v2/v3, PIM-SM/SSM IGMP Snooping Multicast VLAN Registration (MVR)
GPON	GPON OLT Compliant with ITU-T G.984 RemoteONT/MDU Management Automatic ONT Ranging Multiple T-CONTs per MDU (ONT) Supports up to 64 (max 128) Connections Over a Single Fiber
Management	Serial / Telnet (CLI) SNMPv1/v2/v3, RMON
MPLS (*Plan)	RSVP-TE and Path Protection and Local Repair (Head-End) Role EXP-Based QoS Clock Sync*: BITS IEEE 1588v2, SyncE
QOS	Traffic Scheduling (SP, WRR, DRR) 8 Queue per Port Advance Traffic Mangement - Metering, Engress Shaping



ACI Communications, Inc.
23307 66th Avenue South
Kent, WA 98032

Rev B 11-26-2018 Printed in U.S.A.
ACI Communications, Inc. reserves the right to discontinue the manufacture or change specifications without prior notice on any parts illustrated in this data sheet. Registered trademarks are the property of their respective owners